




## The buffer power supply

### APSAAT5

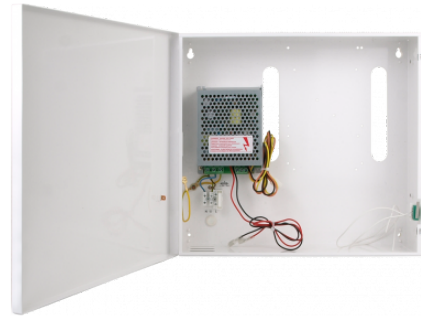

Universal buffer power supply for Kantech KT1-PCB controllers and KaDe brand controllers. 13.8V / 2,5A power supply. To power the controller module, readers, electric locks and battery charging.

Napięcie zasilania	176V-264 V AC
Power consumption	0.45A@230V AC max.
Output Voltage	9.5V-13.8V DC
Output current	2A + 0.5A battery charging
Battery protection	yes
Dimensions	354 x 307 x 101 mm
Dedicated battery	7 Ah
Weight	2.7kg
Working temperature	-10°C...+40°C
Designed for	KT-1, KDH-KS2012-IP, KDH-KS3012-IP